




F2D

Wire


> 3 to 10 mm - 600 N/mm²
> .12 to .4" - 85 ksi

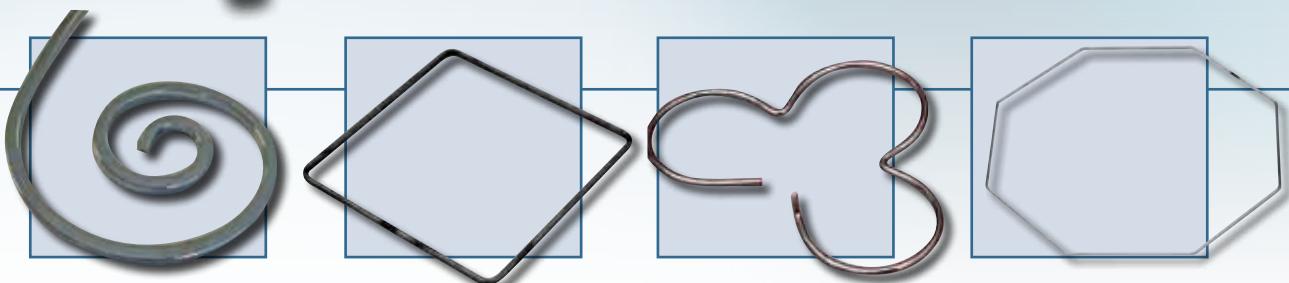

Feed & Form

F2D

Wire



Main Features

- > 2D bending from coil
- > Small to medium quantities
- > Table holds the wire in case of forming long parts
- > CNC correction for out-of-plane deviation
- > Welding parameters programed and saved with the part program
- > Quality cut for good welding results
- > Optional Pick & Place for orderly ejection of the frame

Control

- > industrial PC based software
- > multilingual dialog and programming interface on a 19" touch screen
- > auxiliary functions and availability of inputs/outputs for the control of external units
- > internet connection: remote assistance and chat room

Dimensions

- > 6700 x 1700 x 2200 mm
- > 21.98 x 5.58 x 7.22'

Net weight

- > 3400 kg
- > 7500 lbs



NUMALLIANCE

Parc d'Activités - F 88470 SAINT MICHEL SUR MEURTHE
Tél. : +33 (0)3 29 58 36 15 - Fax : +33 (0)3 29 58 46 47
mail : numalliance@numalliance.com

www.numalliance.com

FTECHFDSeries12-UK